

PRO CHAIR Seat cushion



Model

Swivel chair, skid chair, four-legged frame, C frame, four-legged aluminium frame, four-legged wooden frame

Standard seat cushion
NEXUS


Only for size 6
H15 x W450 x D405 mm



155 150 154 173 153 151 152

100% polyester, 305 g/m² abrasion resistance 100,000 Martindales, 5-year guarantee against fraying, lightfastness 5, flame retardant, flame-retardant foam material


FAME

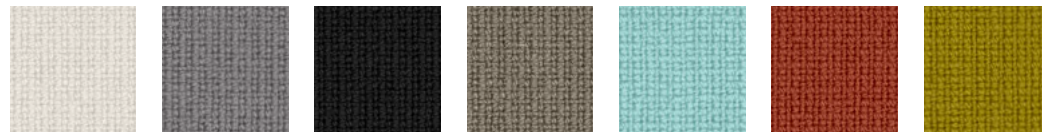

8017 8015 8027 4021 8006 1003 6083

95% New Zealand wool / 5% polyamide, 630 g/m², 150,000 abrasion cycles, light fastness 6, Rub fastness 5-7

CEED

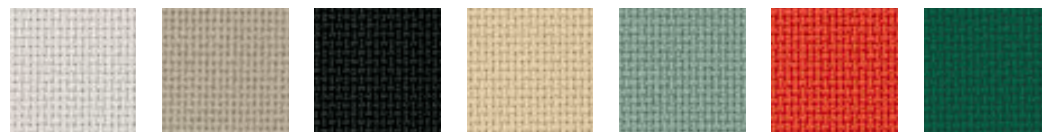


20 12 10 32 14 65 93

85% Pure new wool / 15% Polyamide, CA. 520 g/m², 150,000 abrasion cycles, light fastness 5-7, rub fastness 4-5

Full cushion

Only available for size 6.

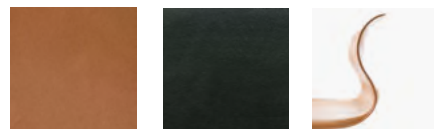

910 901 100% cowhide (2.5 cm thick)
on top and bottom side
with visible decorative stitching all around.

PRODUCT DETAILS

Seat cushions are attached to the seat shell with screws at the factory and can be replaced.